


Single-Inlet, Rigid Media Residential Ducted Coolers

Model	Air Discharge	Cabinet (in)			Duct Opening (in)				Drain Location	
		High	Width	Depth	D	E	K	F	G	H
RM4808S	Side	27 1/4	42	43	17 3/4	17 3/4	12 1/8	1 1/4	12	14 1/2
RM6808S	Side	32 1/4	42	43	19 3/4	19 3/4	11 1/8	1 1/4	12	14 1/2
RM4812S	Side	27 1/4	42	47	17 3/4	17 3/4	12 1/8	1 1/4	12	14 1/2
RM6812S	Side	32 1/4	42	47	19 3/4	19 3/4	11 1/8	1 1/4	12	14 1/2
RM4808D	Down	27 1/4	42	43	17 3/4	17 3/4	12 1/8	1 1/4	12	14 1/2
RM6808D	Down	32 1/4	42	43	19 3/4	19 3/4	11 1/8	1 1/4	12	14 1/2
RM4812D	Down	27 1/4	42	47	17 3/4	17 3/4	12 1/8	1 1/4	12	14 1/2
RM6812D	Down	32 1/4	42	47	19 3/4	19 3/4	11 1/8	1 1/4	12	14 1/2


Electrical Specs					Std. CFM Ratings	CFM delivery vs inches static pressure					
HP	Speeds	Volts	Amperes	Hertz		0	0.1	0.2	0.3	0.4	0.5
3/4	2	115	10.2	60	4800	3600	3400	3200	3000	2800	2600
1	2	115	12.7	60	6800	4400	4200	4000	3800	3600	3400
3/4	2	115	10.2	60	4800	3600	3400	3200	3000	2800	2600
1	2	115	12.7	60	6800	4400	4200	4000	3800	3600	3400
3/4	2	115	10.2	60	4800	3600	3400	3200	3000	2800	2600
1	2	115	12.7	60	6800	4400	4200	4000	3800	3600	3400
3/4	2	115	10.2	60	4800	3600	3400	3200	3000	2800	2600
1	2	115	12.7	60	6800	4400	4200	4000	3800	3600	3400

SIDE DISCHARGE

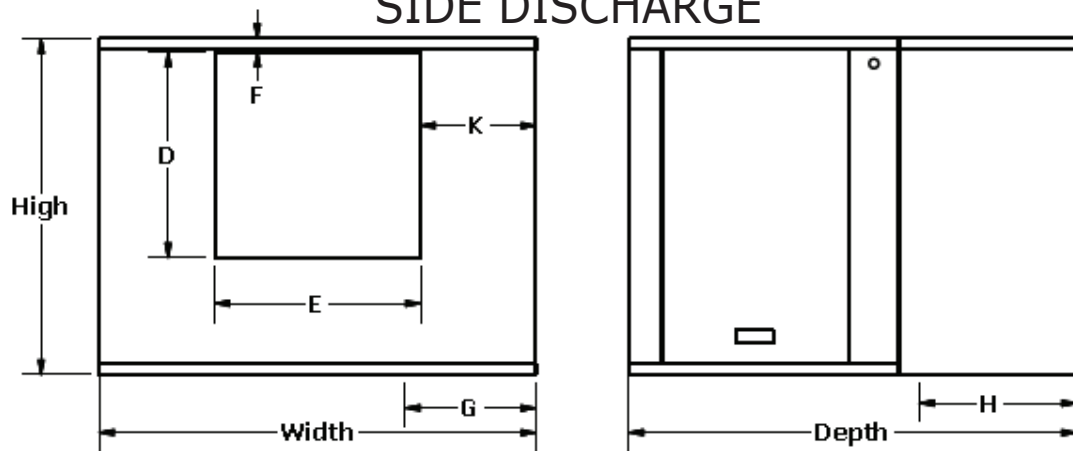

S = side discharge 08 = 8" rigid media D = down discharge 12 = 12" rigid media

DOWN DISCHARGE

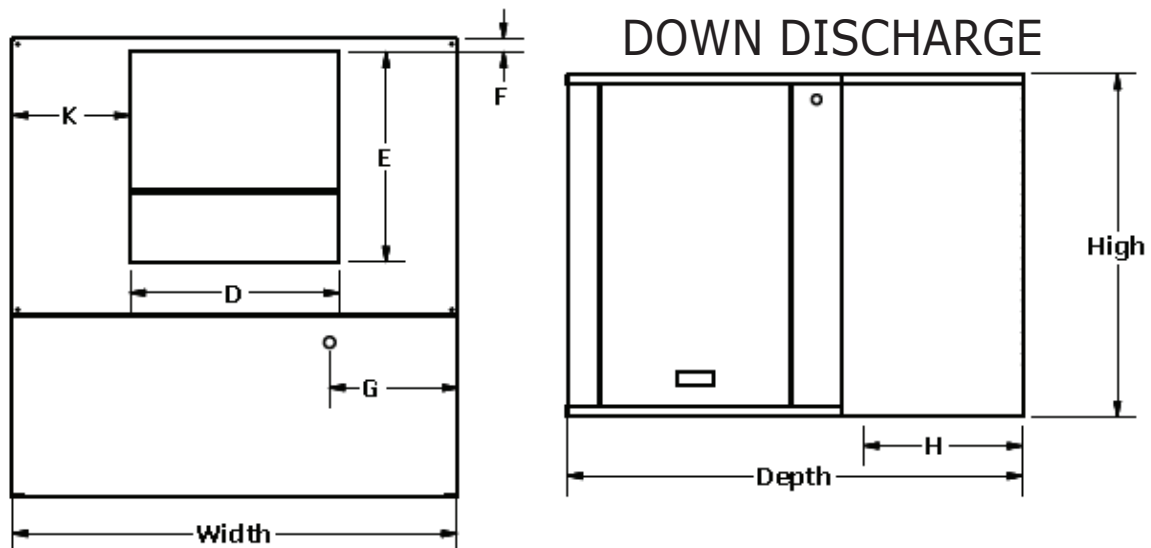

Distributed By:



2727 W. WELDON AVENUE PHOENIX, ARIZONA 85007
 PHONE: 602-264-4815 FAX: 602-277-6039
 WWW.GENERALMETALS.COM



arrange = 8" rigid media D = down dis

SIDE DISCHARGE

