

Job Name: _____
Location: _____
Engineer: _____
Submitted to: _____
Submitted by: _____
Reference: _____

Date: _____
Approval: _____
Construction: _____
Unit #: _____
Drawing #: _____

CEILING CASSETTE



KEY FEATURES:

- Two-way Draining Connection
- Activated Carbon Filter
- GoldFin Anti-Corrosive Coating
- Omni-Directional Airflow
- 12 Indoor Fan Speeds
- Refrigerant Leakage Detection
- Self Diagnosis Function
- Fresh Air Intake





SPECIFICATIONS:

Indoor Model			CH-09MSPHCT-230VI
Power Supply	Rated	V, Ph, Hz	208-230V, 1Ph, 60Hz
Cooling	Rated Capacity	Btu/h	9,000
Heating	Rated Capacity	Btu/h	10,000
Minimum Circuit Ampacity (MCA)		A	1.2
Max. Fuse		A	15
Indoor Air Flow (Hi/Mi/Lo)		CFM	388.5/352.94/305.88/270.59
Indoor Noise Level (Hi/Mi/Lo)		dB(A)	37.5/34.5/31.5
External static pressure (SlimDuct/AHU only)		in. WG	
Drainage water pipe diameter		inch	1"
Diameter of refrigerant pipe (Liquid/Gas Side)		Inch	1/4" - 3/8"
Dehumidification		Pnt/H	2.11
Communication wiring			14AWG*4
Indoor	Dimension (W×D×H)	inch	22.44x22.44x10.24
	Packing (W×D×H)	inch	26.06x26.06x12.48
	Net/Gross Weight	lbs.	31.97/38.14

CH-09MSPHCT-230VI

CEILING CASSETTE

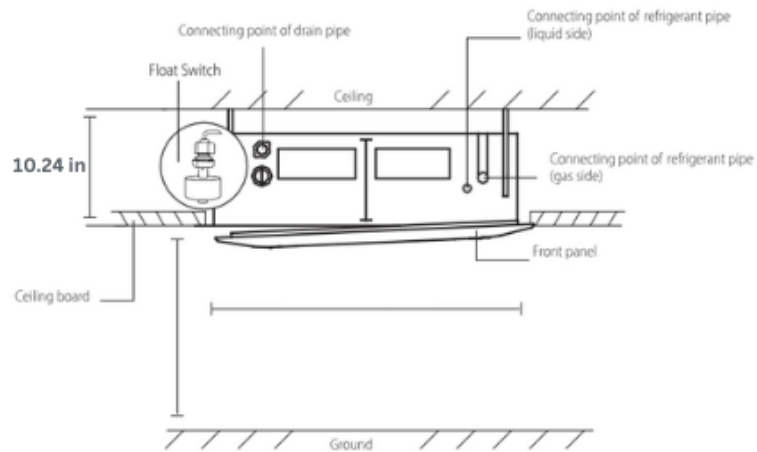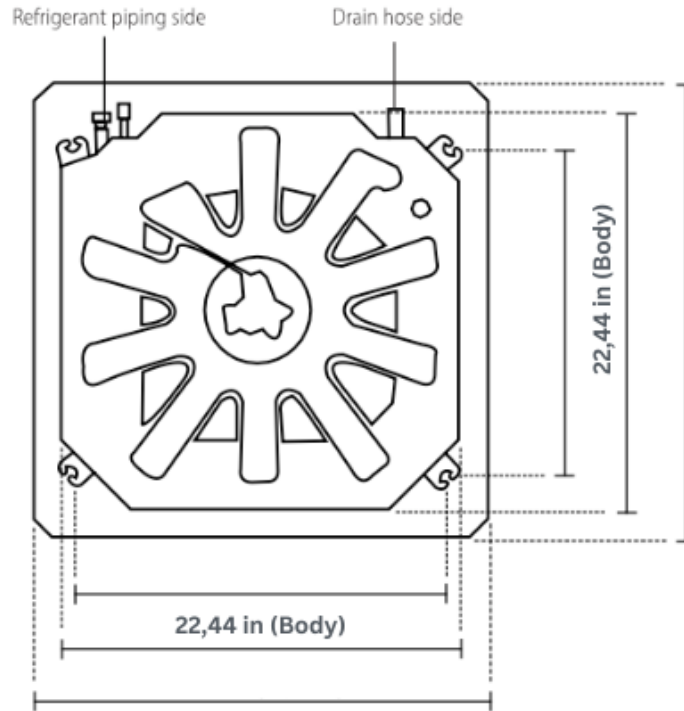

22.44x22.44x10.24