

Dimensions/Certified CFM

Model	Cabinet (in)			Duct Opening (in)				Drainage (in)	
	High	Width	Depth	Opening		Position		Position	
	H	W	D	A	B	C	E	F	G
A38S	28 1/4	28	28	13 3/4	13 3/4	10	7 1/8	14	4 1/2
A48S	35 1/4	34	34	17 3/4	17 3/4	11 3/4	8 1/8	17	5 1/2
A68S	42 1/4	37	37	19 3/4	19 3/4	12 1/4	8 5/8	18 1/2	6
A38D	25 1/4	28	28	13 3/4	13 3/4	4	7 1/8	14	4 1/2
A48D	35 1/4	34	34	17 3/4	17 3/4	4 1/2	8 1/2	17	5 1/2
A68D	42 1/4	37	37	19 3/4	19 3/4	4 3/8	8 5/8	18 1/2	6


Model	Bottom Pan (in)	Pads (in)			Blower (in)			V-Belt
	High	#	High	Width	Diameter	Width	Shaft	Designation
	J							
A38S	3 1/2	3	21 1/4	21 1/2	12	12	5/8	A-43
A48S	3 1/2	3	28 1/8	27 1/8	16	16	5/8	A-57
A68S	3 1/2	3	35 7/16	30 1/2	19	18	1	A-58
A38D	3 1/2	4	21 1/4	21 1/2	12	12	5/8	A-42
A48D	3 1/2	4	28 1/8	27 1/8	16	16	5/8	A-56
A68D	3 1/2	4	35 7/16	30 1/2	19	19	1	A-58

Model	Air Delivery (CFM) vs Static Pressure						
	Nominal CFM	Water Inch Column					
		0	0.1	0.2	0.3	0.4	0.5
A38S	3800	2300	2260	2210	2115	1965	1770
A48S	4800	3600	3530	3350	3120	2860	2565
A68S	6800	4900	4610	4350	4080	3920	2880
A38D	3800	2300	2260	2210	2115	1965	1770
A48D	4800	3600	3530	3350	3120	2860	2565
A68D	6800	4900	4610	4350	4080	3920	3880

Electrical Specs. Motor					Blower Pulley (in) Diameter	Weight (lbs)	
H.P.	Speeds	Volts	Hertz	Amperes		Shipping	Working
1/3	2	115	60	5.5	7	79.7	171.8
1/2	2	115	60	7.5	11	126.0	270.9
3/4	2	115	60	10.2	11	170.0	326.0
1/3	2	115	60	5.5	7	88.5	173.0
1/2	2	115	60	7.5	11	134.8	249
3/4	2	115	60	10.2	11	181	296

Side Discharge

Down Discharge

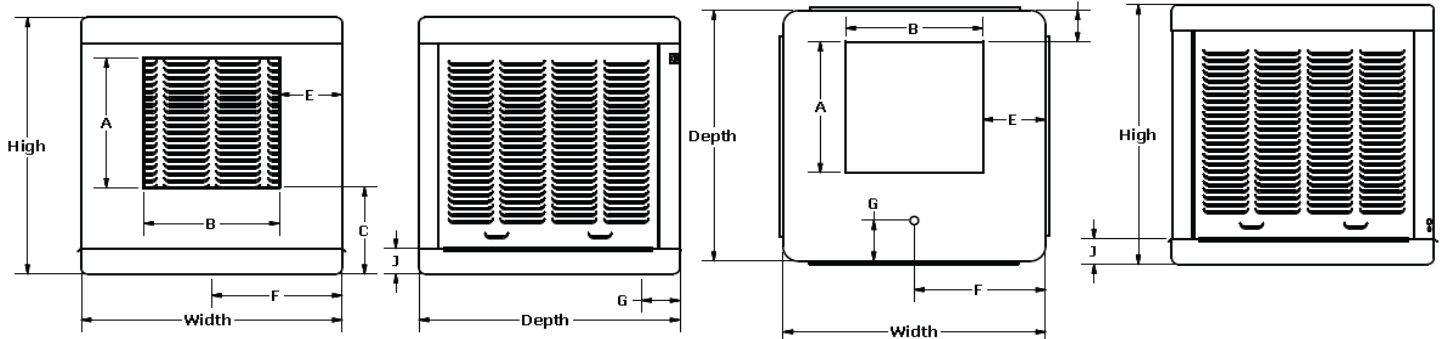

Distributed By:



2727 W. WELDON AVENUE PHOENIX, ARIZONA 85007
 PHONE: 602-264-4815 FAX: 602-277-6039
 WWW.GENERALMETALS.COM

